

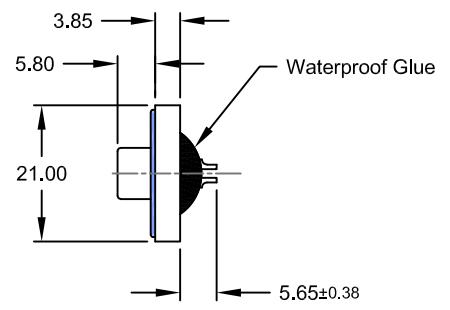
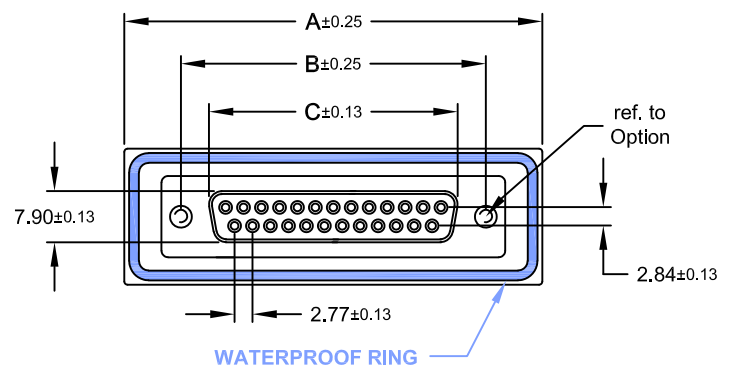



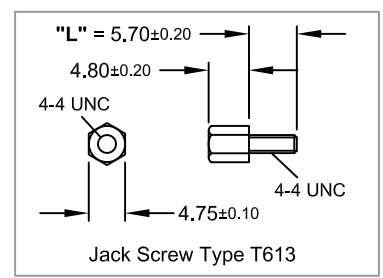
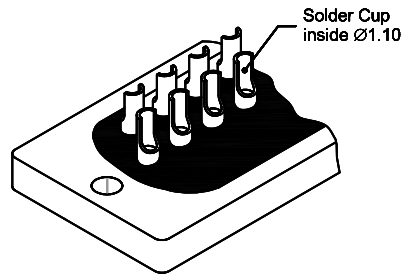


REV.	DESCRIPTION	DATE	DRAWN
A	New	10.11.2006	RH
C	general update	15.03.2017	RH
D	general update	27.02.2018	Ronny
E	update	05.08.2019	Ronny

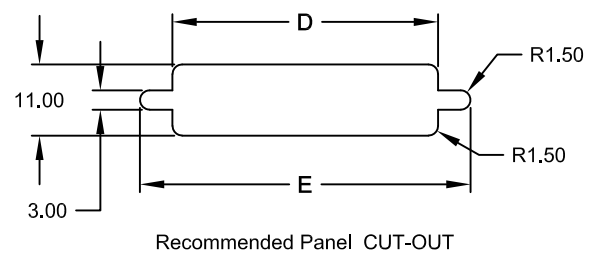

Order Code
SDF-xxx-SIP01-55/TXX

Dimension mm					No. of Contact
A	B	C	D	E	
39,40	24,99	16,33	20,00	28,20	009
47,70	33,32	24,66	28,00	36,50	015
64,50	47,04	38,38	41,50	51,00	025

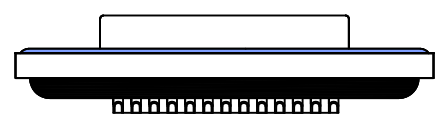

Panel Thickness
Screw "L" = 5.70 for Panel thickness "X" between 1.20~2.00mm

Specifications
Electrical
Current rating: 5A
Insulation resistance: 5000MΩ min.
Contact resistance: 10mΩ max.
Voltage rating: 250V AC rms max.
Withstanding voltage: 1000V AC rms

Material
Contact: Brass
Plating: Au flash over Ni
Insulator: PBT UL 94V-0
Shell: Steel
Plating: Ni
Operating temperature: -55°C to +85°C



Salt Spray: 48 Hours
Waterproof rating: IP 67 min.

E-tec 2019 © - all rights reserved www.e-tec.asia



UNIT mm	GENERAL TOLERANCE		DRAWN RH	DATE 10.11.2006	DWG. NO. SDF-SIP01/T	SHEET 1/1				
	SCALE Free	X.° ±					X. ±	CHECK Ronny	DATE 05.08.2019	REV. E
		.XX° ±					.XX ± 0.25			
		.XXX° ±					.XXX ±			
APPROVE Fagi		DATE 05.08.2019	SERIES NO. SDF-xxx-SIP01-55/TXX							

Waterproof D-Sub "Female"
Standard
Solder Cup Type